

Wired remote control - APS-440

AutoVoice BR-200
Product datasheet

Features

- Mixing of 4 input signals
- Priority of the remote control and activation of the LF signal
- According to the programming of the APS-990
- Processor module for the function of the APS-04


Description

Microphones and music devices can be connected to the remote controls. Volume and tone can be controlled individually. The illuminated pushbutton is used to activate the PA system. Various programming options (phantom power supply and priorities etc.) are available.




Part number	Description
116-BRG-APS440	Remote control 1 mic/ 3 AUX
116-BRG-APS440A02	Remote control 2 mic/ 2 AUX

Technical specifications	
Input sensitivity	Microphone: -60dBm (0,775mV) Auxiliary (music): -10dBm (0,245V)
Input impedance	Microphone: 200Ohm Auxiliary (music): 47KOhm
Connection	Microphone: balanced Auxiliary (music): unbalanced
Phantom powering (Ph) for condenser microphone	12VDC
Output signal	+6dBm (1,5V)
Output impedance	600Ohm
Connection	Balanced
Balancing	Made by LF transformer (with electrical insulation)
Supply	15VDC/50mA

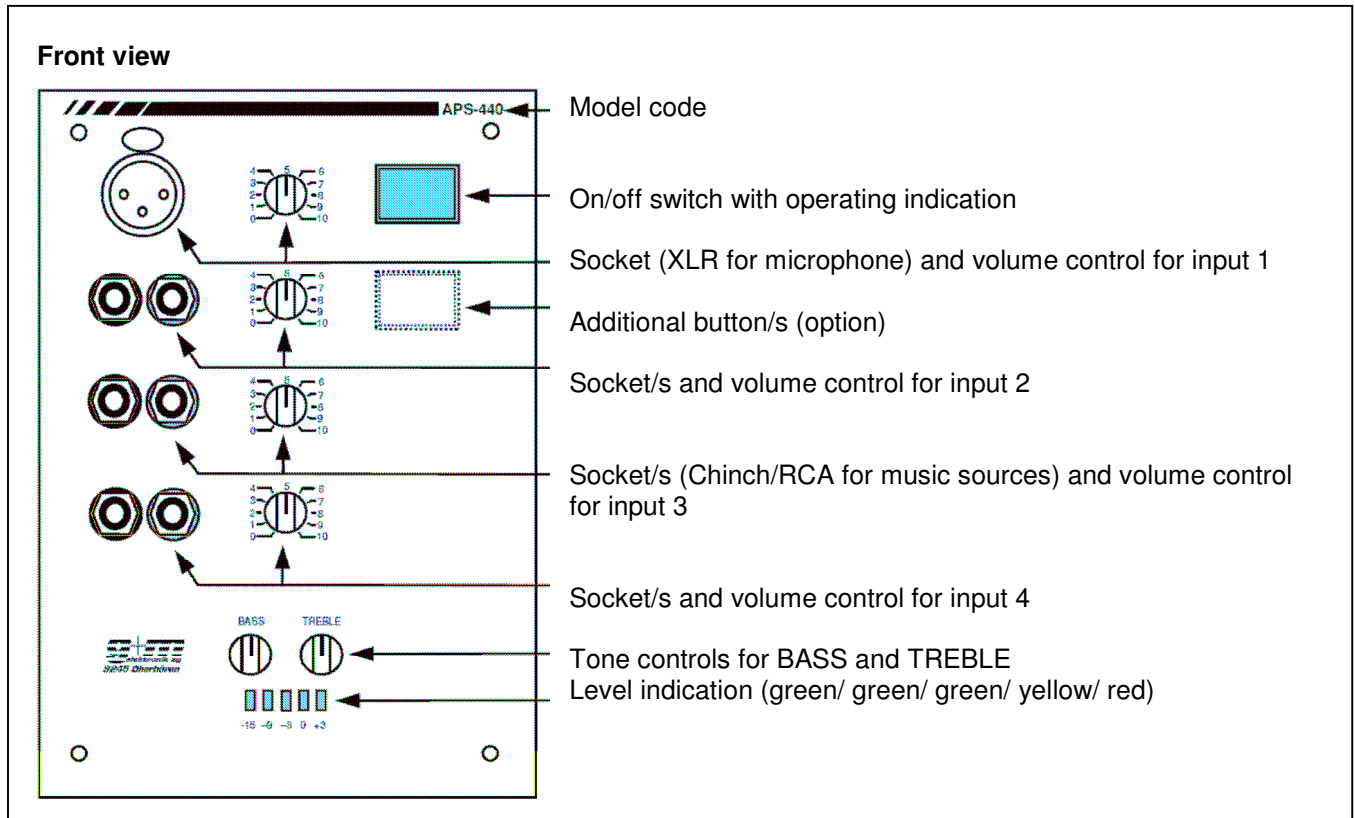

Connections

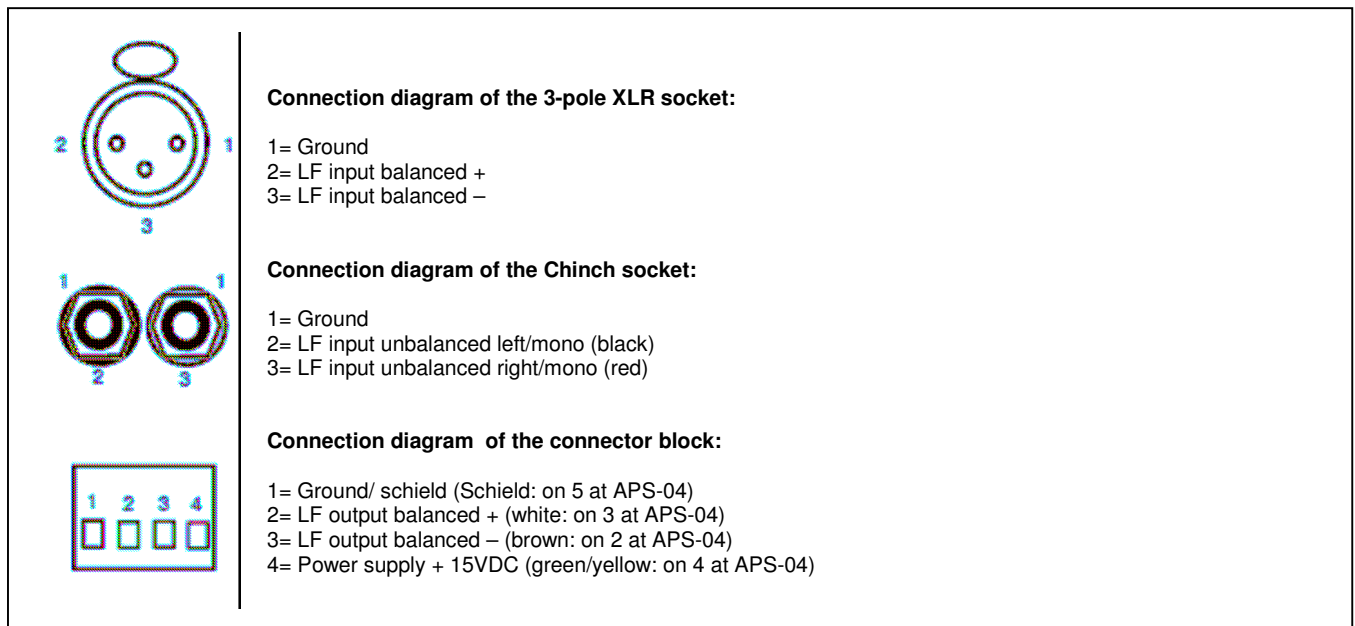

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com