

Input module for remote control unit - APS-04

AutoVoice BR-200
Product datasheet

Features:


- Remote activation of the system
- Priority activation
- Internal power supply of panels
- Remote panel with 4 inputs for local sound sources (Mic/Aux)
- Only one remote panel can be connected to the same APS-04



Technical specifications	
Input sensitivity	0dBm (0,8V)
Connection	Balanced
Balancing	Made by LF transformer
Electrical insulation	Made by LF transformer
Input impedance	600 Ohms
LF signal (input)	Low frequency (20Hz-20kHz)

Part number	Description
116-BRG-APS-04	Input unit ARC/DRC

Front view

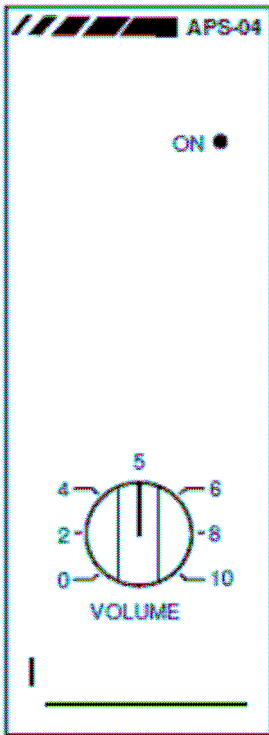


- ←-I Model code

- ←-I Operating indication
(lights, if the remote control unit and the module are ready)

- ←-I Volume control

- ←-I Sound source label

Rear view

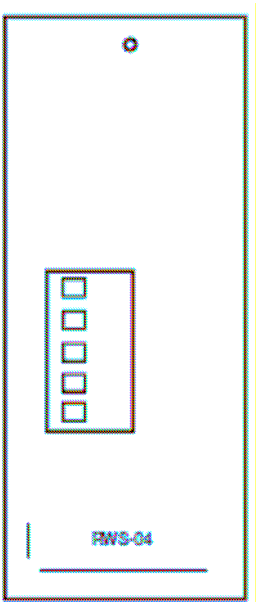

- ←-I Connector block

- ←-I Input label

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com