

Output module for speaker lines APS-62.1/APS-64.1

AutoVoice BR-200
Product datasheet

Features


- For no-loss adjustment of individual loudspeaker zones (groups) for individual volume
- Optionally external/internal volume control bypass for single paging, group paging, general paging and alarms etc., depending on AutoVoice BR-200 programming
- High-quality system technology combined with an attractive, modern design!

APS-62.1 - Output module for 2 speaker lines, 100V

- For optimum control of volume to 2 speaker zones for individual adjustment of volume in each zone as required
- Module with 2 step switches, each with 10 positions and OFF.
- Optional internal and/or external volume control for call/chime/alarm, etc., depending on programming
- RWS-62 connection module accessory with 6-phase plug-in terminal board (speaker lines, external volume control), together with additional 4-phase plug-in terminal board for extra APS-62.1 and APS-64.1 modules
- Operating keys may be removed (using pliers) as required. Unit is then operated using a screwdriver (to avoid changing settings accidentally)

APS-64.1 - Output module for 4 speaker lines, 100V

- As APS-62.1, for optimum control of volume to 4 speaker zones for individual adjustment of volume in each zone

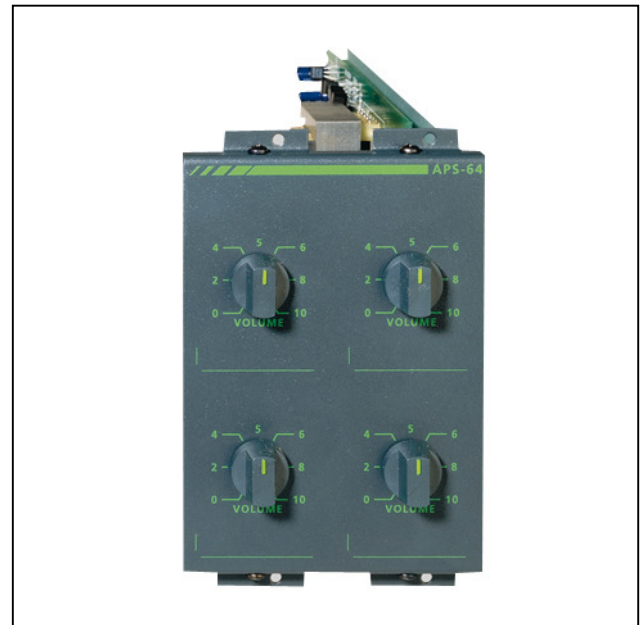


Technical specifications


APS-62.1	
Max. capacity per module	250W
Control	2 step switches, each with 11 positions (10 volume stages and OFF) for speaker lines/groups/zones, 100V.
Relay	2 relays for input/output to 2 lines - 1 relay for bypassing the internal controls and 1 relay for bypassing external adjustment.
Programming	Functions are programmed in APS-990
Max. effect to the integrated automatic transformer	250W (sum of the sinus effects to both lines)
APS-64.1	
Max. capacity per module	250W
Control	4 step switches, each with 11 positions (10 volume stages and OFF) for speaker lines/groups/zones, 100V
Relay	4 relays for input/output to 4 lines - 2 relays for bypassing the 4 internal controls and 2 relays for bypassing external adjustment.
Programming	Functions are programmed in APS-990
Max. effect to the integrated automatic transformer	250W (sum of the sinus effects of all 4 lines)

Part number	Description
116-BRG-APS62.1	Output module for 2 speaker lines, 100V
116-BRG-APS64.1	Output module for 4 speaker lines, 100V

Front view (FRS)

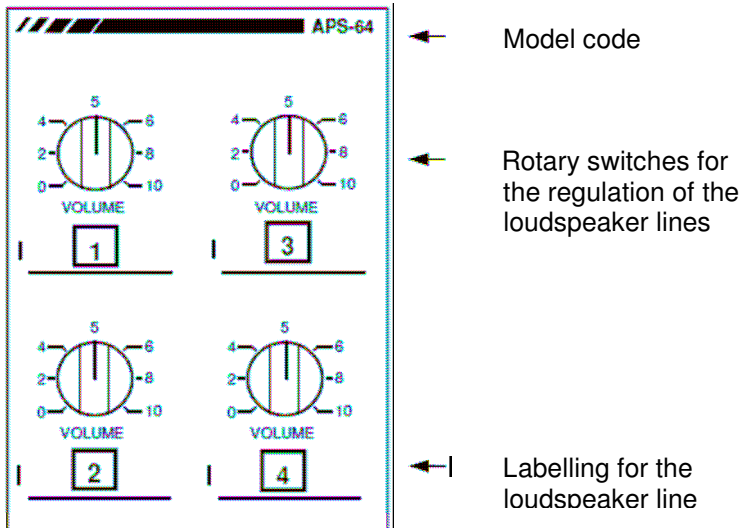

Rear view (RWS)

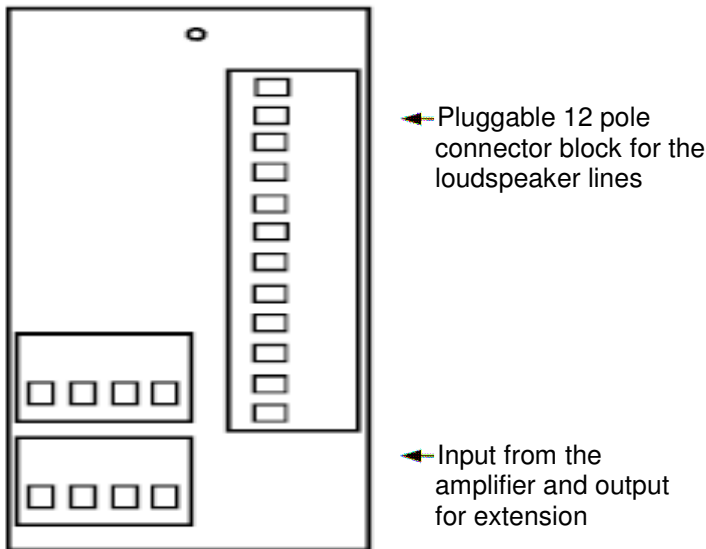

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01