

Manual call point - BF-34A

Analogue addressable fire detection systems
Product datasheet

Features

- Suitable for outdoor use
- Intended for use with BS-100 and BS-60 fire alarm panels
- Maximum 3 seconds response time

Applications

BF-34A is a manual call point suitable for outdoor use. The call point must be installed according to local regulations, which normally means along escape routes, landings and exits.

Principle

Gives alarm when the glass is broken. Reset when a new glass is mounted. Can be tested by means of a special test-key.





Part number	Description
116-BF-34A	Manual call point BF-34A
116-BFG-3	Glass for manual call points, without text
116-4860-011.0100	Polycarbonate cover

Technical specifications	
Dimensions (H x W x D)	87 x 87 x 56 mm
Weight	240 g
Material	ABS
Colour	Red
Voltage	14 VDC \pm 2 V
Current consumption	
Stand by:	0,3 mA
Signal normal:	35 mA
Signal Alarm:	> 45 mA
Degree of protection	IP66
Environment requirements	Acc. EN 54-11
Environment	For outdoor use
Working temperature	- 20 to + 70°C
Humidity (non-condensing)	Max. 95% RH
Maintenance	Replace broken glass
Service	Replace if faulty

Connections/Dimensions

1	Detector loop in +
2	Detector loop out +
3	Detector loop in -
4	Detector loop out -

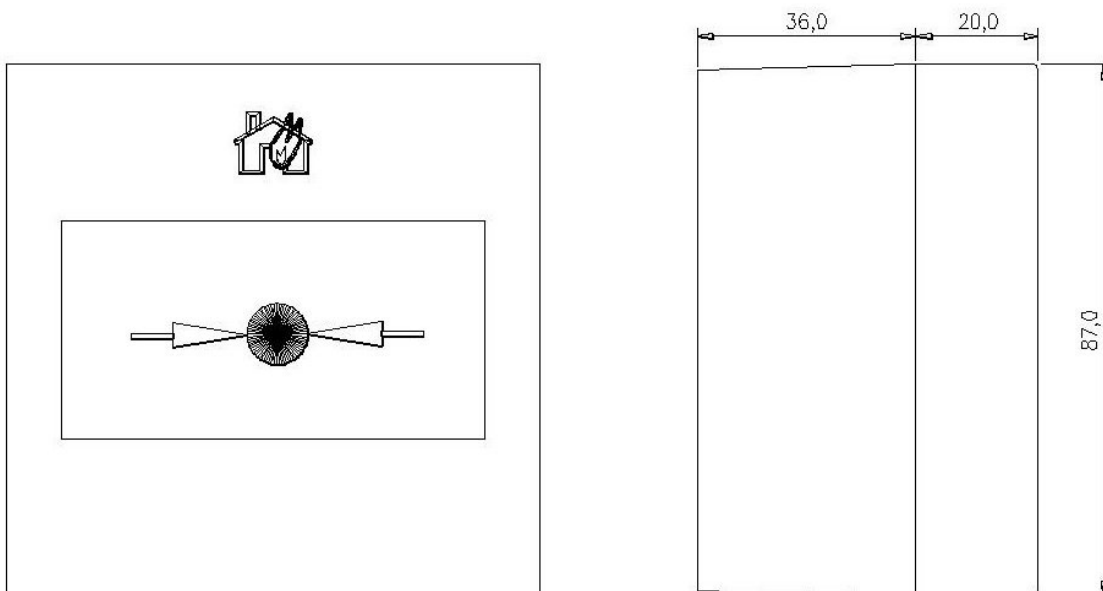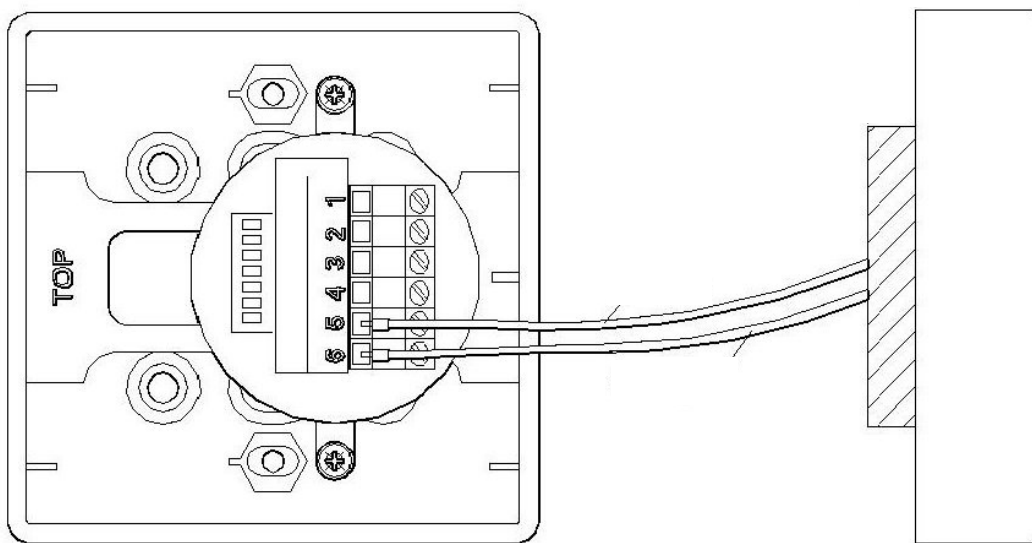

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com