

BR-210/45 - Operator panel for BR-45

AutroVoice
Product datasheet

Features

- Announcements are given the highest priority in the system
- Monitored fire brigade microphone for announcements, equipped with a spiral wire
- Function buttons used to start/stop evacuation announcements
- LED indicators that are lit during evacuation announcements, faults and power.
- On-wall and flush mounting, rack mounting in standard 19" cabinets

Description

BR-210/45 is an operator panel used in the AutroVoice BR-45 system. The panel has function buttons that are used to manually start and stop evacuation announcements. A LED indicator is lit when evacuation announcements are made. The LED indicator also indicates faults in the system. The panel provides a fireman's microphone, allowing the fire brigade to make announcements to the premises. These announcements are given the highest priority in the system, allowing the fire brigade to override everything and announce direct messages in any situation, even in an alarm situation.

The panel is equipped with a lock that is opened by means of a fireman's key.



Technical specifications

Maximum distance between BR-210/45 and BR-45-sentral	100 m
Cable between BR-210/45 and BR-45-sentral	BRG-GZ928 and signal cable

LED indicators


Evacuation	Alert message running
Fault	Fault in BR-45 system
Power	230V/24V present

Buttons

Evacuation	Start pre-recorded alert message
Reset	Stop alert message

Part number	Description
116-BR-210/45	Operator panel for BR-45

Dimensions

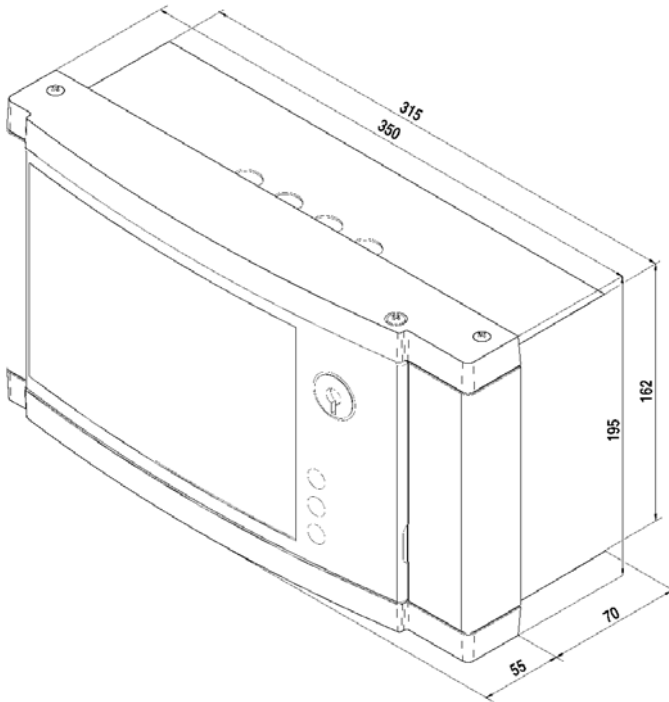

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no

Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99

Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com