

# AutoVoice BR-200 Microphone command console

## System components APS-308 / APS-316 / APS-324

Programmable digital microphone command console for bi-directional bus communication.

A new series of "intelligent", digital microphone command consoles, with all key functions programmed as required.

Bi-directional data bus for data communication (providing substantially lower installation costs).

Parallel connection of up to 30 digital microphone consoles on 4-phase system cable (GZ-928).

Can be expanded with a LED unit for indicating up to 8 programmable information inputs (refer to Special Functions).

Label fields for marking the individual functions - extremely user-friendly and error-free operation.

**Modular expansion:**

- Units with 8 freely programmable keys with LED (max. 64, APS-364).


**Extra:**

- Modular expansion with LED unit for indicating up to 8 programmable information inputs (APS-309, APS-317, APS-325 etc.)



**Technical specifications**

<b>APS-3xx</b>	
Microphone	Capacitor microphone on swan-neck extension
NF output	Bus with galvanic-isolated transformer
Output level	0 dBm (775 mV)
Volume and tone	Adjusted from underside of console using a screwdriver
Output impedance	600Ohm
Connecting pattern	Symmetrical
Functions/priorities	In accordance with APS-99 programming
Keys	Max. 64 (with max. number LED indicator units, max. 56)
<b>LED-indicators:</b>	
Red	System in use(higher priority active)
Yellow	Gong activated (extra) or lower priority active
Green	System open (ready for talking)
Extra LED	Expansion with LED unit for indicating up to 8 info.inputs (extra)

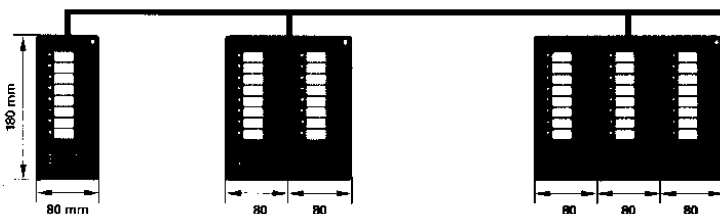

**Bidirectional BUS line to central-system (GZ-928)**



Article number	Description
BRG-APS308	Programmable digital microphone command console for bi-directional bus communication, with 8 keys, 7 programmable
BRG-APS316	As APS-308 with 16 keys, 15 programmable
BRG-APS324	As APS-308 with 24 keys, 23 programmable
BRG-APS332	As APS-308 with 32 keys, 31 programmable

Artikkelnummer	Beskrivelse
BRG-APS340	As APS-308 with 40 keys, 39 programmable
BRG-APS348	As APS-308 with 48 keys, 47 programmable
BRG-APS356	As APS-308 with 56 keys, 55 programmable
BRG-APS364	As APS-308 with 64 keys, 63 programmable

**APS-308/316/324**

