## AutroVoice BR-200

## 6W Flush-mounted Loudspeaker BBR-BK560/T


## 6W Loudspeaker for flush-mounting

BBR-BK560/T flush-mounted loudspeaker is produced in aluminium, and is designed to reproduce vocal sound and music in the best possible fashion.

The speaker has a spring-loaded mounting system that makes installation quick and simple.

BBR-BK560/T is supplied in white as standard, but can be supplied in other RAL colours as required.



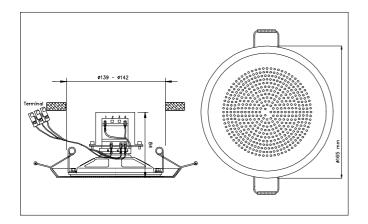

## **Technical specifications**

Туре	White aluminium flush-mounted loudspeaker
Connection	Rapid coupling (spring)
Dimensions (ØxD)	Ø165x84
Weight with transformer	0.5kg
Max. output	6W
Impedance without transformer	8ohm
Tapping (100V transformer)	0.5W – 0.9W - 0.75W-1.5W - 3W - 6W
Effective frequency range	110 - 15,000Hz
Sound pressure (SPL) 1w/m	90dB
Distribution at v/1000Hz	170°
SPL m/max. output	97dB



Autronica Fire and Security AS Fire and Security, Trondheim, Norway. Phone: + 47 73 58 25 00, fax: + 47 73 58 25 01. Oil & Gas, Stavanger, Norway. Phone: + 47 51 84 09 00, fax: + 47 51 84 09 99. Autronica Industrial Ltd., Watford, United Kingdom. Phone: 1923 23 37 68, fax: 1923 22 55 77.