

## Konvensjonell / *Conventional*

**Anvendelse:**

Manuell melder for bruk i fuktige rom.

**Application:**

Manual call-point for use in damp areas.

**Prinsipp:**

Gir alarm når glasset knuses. Tilbakestilles når nytt glass blir satt inn. Kan alarmtestes ved hjelp av en spesialnøkkel.

**Principle:**

Gives alarm when the glass is broken. Reset when a new glass is mounted. Can be tested by means of a special test-key.

**Versjoner:**

BF-21 Standardutgave.

**Versions:**

BF-21 Standard version.

# Tekniske data / Technical data: BF-21





## Tekniske data / Technical data:

Dimensjoner / Dimensions: (H x B x D) / (H x W x D)	: 123 x 160 x 87 mm
Vekt / Weight	: 1000 g
Materiale / Materials	: Rødfarget korrosjons- beskyttet silumin / Red corrosion proof silumin
Spenning / Voltage	: 14 V DC $\pm$ 2 V
Strømforbruk / Current consumption	
Normal / Normally	: 0 mA
Alarm / Alarm	: >60 mA
Miljøkrav / Environment requir.	: Iflg. BS 5839 / Acc. to BS 5839
Beskyttelsesgrad / Degree of protection	: IP 44D Acc. to BS-5839
Arbeidstemperatur / Working temperature	: - 30°C to + 70°C
Fuktighet (ikke kond.) / Humidity (non condensing)	: Max. 95 % R.H.
Kabelinnføring / Cable inlets	: 2 x PG-16


Vedlikehold / Maintenance	: Normalt ikke nødvendig Normally none.
Service / Service	: Skiftes ved feil / Replace if faulty

Godkjenninger / Approvals:  
See Autronica booklet "Type Approvals" - Appro/M-E

## Dimensjoner og tilkobling/ Dimensions and connection:

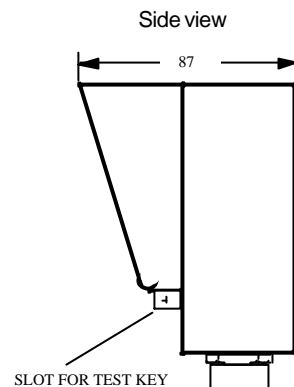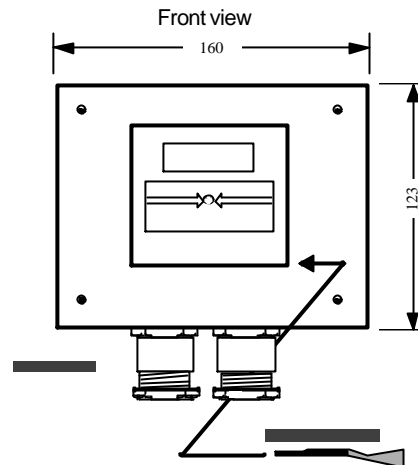

## Connection / Mounting holes

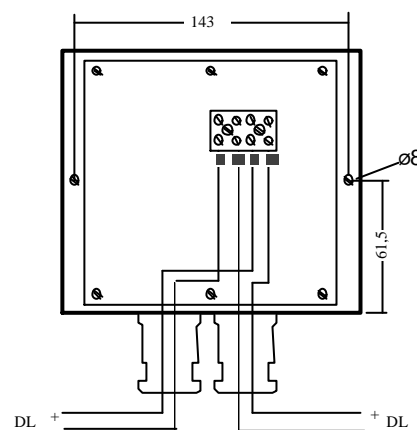

DL Detektorsløyfe / Detector loop.

Med forbehold om endringer uten foregående varsel/Subject to changes without notice

**Oil & Gas, Stavanger.**  
Telefon: 51 84 09 00, fax: 51 84 09 99.

**Autronica Industrial Ltd.** Watford, England.  
Phone: 1923 23 37 68, fax: 1923 22 55 77.

**Autronica Fire and Security AS**, 7483 Trondheim. Telefon: 73 58 25 00, Fax: 73 58 25 01