

# Surface-mounted wall/ceiling speaker – BBR-DAL 165/10 PP

Voice alarm system

Product datasheet


## Surface-mounted wall/ceiling speaker

This surface-mounted wall/ceiling speaker is excellent for voice alarm. All of our certified wall/ceiling speakers according to EN 54-24:2008 are equipped with ceramic terminal block, thermal fuse and have a temperature resistant cable, offering increased security in case of fire.

This surface-mounted wall/ceiling speaker, made of powder-coated metal, shows excellent acoustic characteristics and a high efficiency. It is therefore ideally suited for a wide variety of applications. The mounting brackets allow installation on ceilings and walls, even where regular installation would not be possible.

Approved according to EN 54-24:2008

## Dimensions (mm)

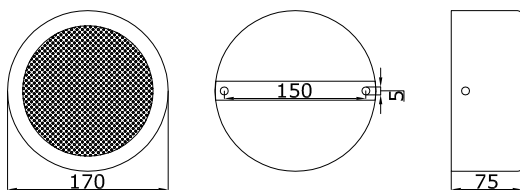

## Technical specifications

Certification	EN 54-24:2008
Loading rate	10 Watt
Chassis type	165 mm full range
Frequency range (-10 dB)	225 – 22 200 Hz
SPL 1 W / 1 m	100,6 dB
SPL Pmax / 1 m	110,6 dB
Radiation angle 1.000 Hz (-10 dB)	180°
Transformer	100 V, 10/6/3/1,5 Watt
Dimensions	Ø = 170 x 75 mm
Weight	1,4 kg
Material	Powder-coated steel panel
Connection	3-pole ceramic clamp
Colour	RAL 9010 White

Part number	Description
116-BBR-DAL 165/10 PP	CAB SPEAK 10W DAL 165/6 EN54

**AUTRONICA FIRE AND SECURITY AS**

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: [info@autronicafire.no](mailto:info@autronicafire.no)

Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99

Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: [www.autronicafire.com](http://www.autronicafire.com)