


# Horn speaker - BBR-DK-10/T PP

Voice alarm system  
Product datasheet

## Horn speaker

Powerful horn speaker for voice alarm. Equipped with ceramic terminal block, thermal fuse and a temperature resistant cable, providing increased security in case of a fire.

BBR-DK-10/T PP is approved according to EN 54-24:2008. The horn speakers of the DK series are particularly applicable for the reproduction of announcements and warnings. Due to their excellent capability and enormous sound pressure they are perfectly suitable for indoor as well as for outdoor use. The model with 2 cable glands allows to loop in loop out the cabling. This avoids the need for an additional junction box.

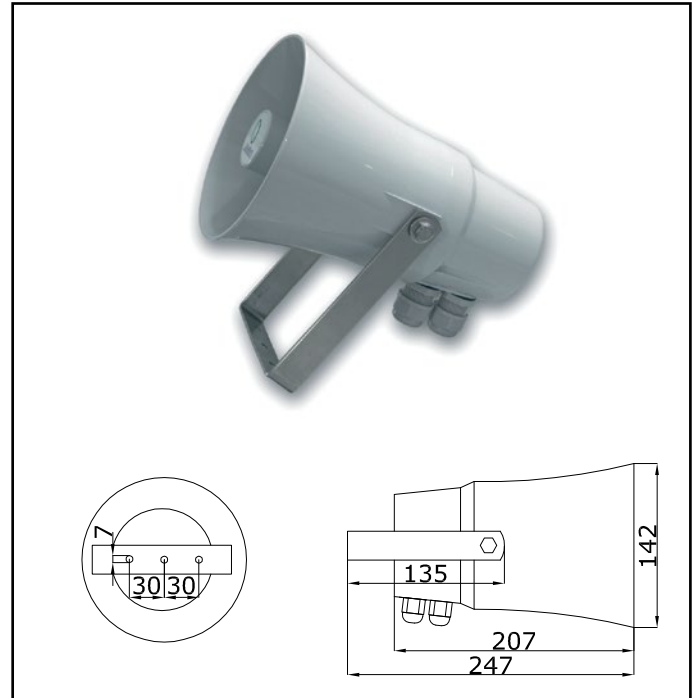

Technical specifications	
Certification	EN 54-24:2008
Loading rate	10 Watt
Frequency range (-10 dB)	380 — 9 000 Hz
SPL 1 W / 1 m	106 dB
SPL Pmax / 1 m	116 dB
Radiation angle 1.000 Hz (-10 dB)	210°
Transformer	100 V, 10/5/2,5/1,25 Watt
Dimensions	Ø142 x 207 mm
Weight	1,7 kg
Material	ABS plastic housing
Connection	3-pole ceramic clamp
Colour	RAL 7035 Grey
Protection	IP66

Part number	Description
116-BBR-DK-10/T PP	HORNSPEAKER 10W DK-10/T EN 54

**AUTRONICA FIRE AND SECURITY AS**

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: [info@autronicafire.no](mailto:info@autronicafire.no)

Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99

Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: [www.autronicafire.com](http://www.autronicafire.com)