

Projector loudspeaker - BBR-PS300/LBT

AutoVoice BR-200
Product datasheet

Features

- Elegant designed 30-watt projector loudspeaker
- With 2-way loudspeaker system
- BBR-PS300/LBT provides excellent fidelity for both vocal sound and music, with a very broad frequency range
- BBR-PS300/LBT is supplied in white or black as standard, but other colours are available on request

Description

The loudspeaker is supplied in 2 versions. A pendulum suspension fitting with 2m cable, or for fitting with a U-bracket. The loudspeaker can also be supplied with a swivel-bracket. With the pendulum fitting the speaker must not be suspended more than 5m above the floor.




Technical specifications

Materials	White polyamid plastic
Connection	Cable end 2m
Dimensions (ØxL)	Ø157x178
Weight with transformer	2,5 kg
Max. output	30W
Tapping (100V transformer)	2W - 2,7W - 5,5W - 7,5W - 15, 5W - 30W
Effective frequency range	80-20.000 Hz
Sound pressure (SPL) 1w/1m	87 dB
SPL w/max. output	102 dB
Distribution at 1000 Hz	120°
Max. / min. temperature	90°C/-20°C

Part number	Description
116-BBR-BRAK01	Swivel bracket for BBR-PS300/T
116-BBR-PS300LBT	Loudspeaker pendulum 30 W

Dimensions

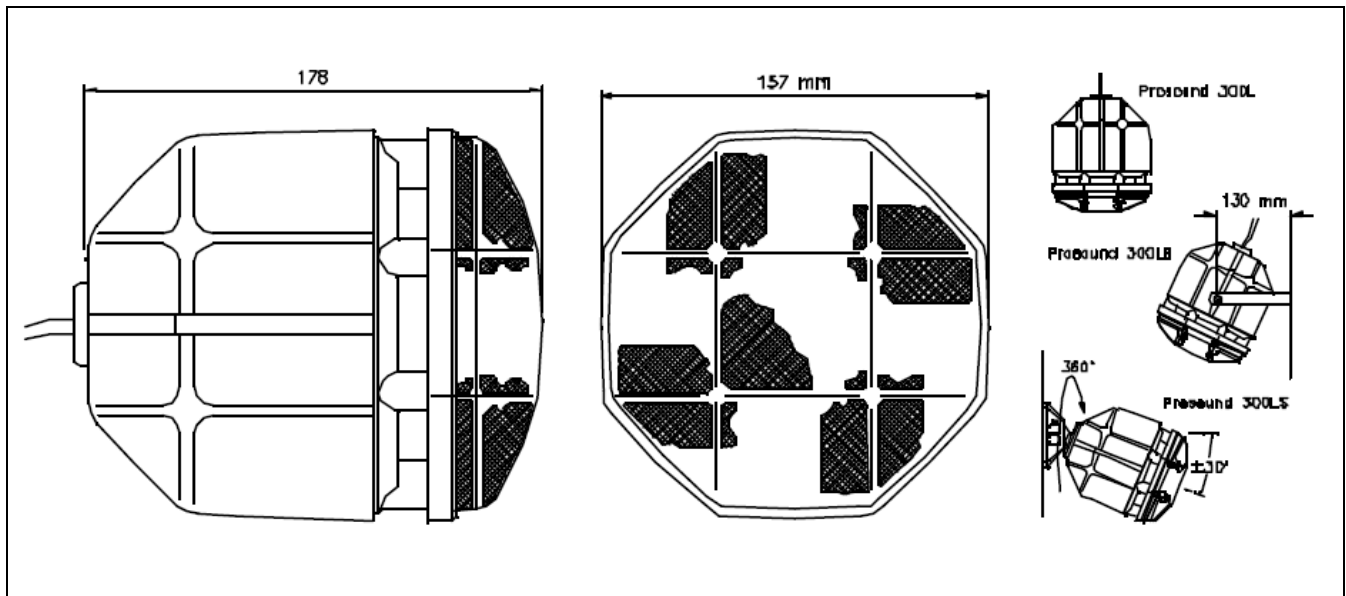

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com