

Projector loudspeaker - BBR-PS6/T

AutoVoice BR-200
Product datasheet

Features

- Elegant designed 6 W projector loudspeaker
- IP56
- BBR-PS6/T provides excellent fidelity for both vocal sound and music, and can be used both indoors and out
- BBR-PS6/T is supplied in white as standard, but other colors are available on request

Description

The loudspeaker is supplied in 3 versions. A pendulum suspension fitting with 2m cable is standard.

It can also be supplied with a U-bracket or swivel bracket. With the pendulum fitting the speaker must not be suspended more than 5m above the floor.

Versions

- BBR-PS6/T Loudspeaker pendulum 6 W
- BBR-PSBRAK01 Swivel bracket for BBR-PS6/T
- BBR-PSBRAK02 U bracket for BBR-PS6/T




Technical specifications

Materials	White polyamid plastic
Connection	Cable end 2 m
Dimensions (ØxL)	157x160
Weight with transformer	1,2 kg
Max. output	6 W
Tapping (100V transformer)	0,3W - 0,5W - 1W - 1,5W - 3W - 6W
Effective frequency range	150 - 18.000 Hz
Sound pressure (SPL) 1w/1m	88 dB
SPL w/max. output	96 dB
Distribution at 1000 Hz	180°
Max. / min. temperature	90 °C / -20°C

Part number	Description
116-BBR-BRAK01	Swivel bracket for BBR-PS6/T
116-BBR-BRAK02	U bracket for BBR-PS6/T
116-BBR-PS6/T	Loudspeaker pendulum 6 W

Dimensions

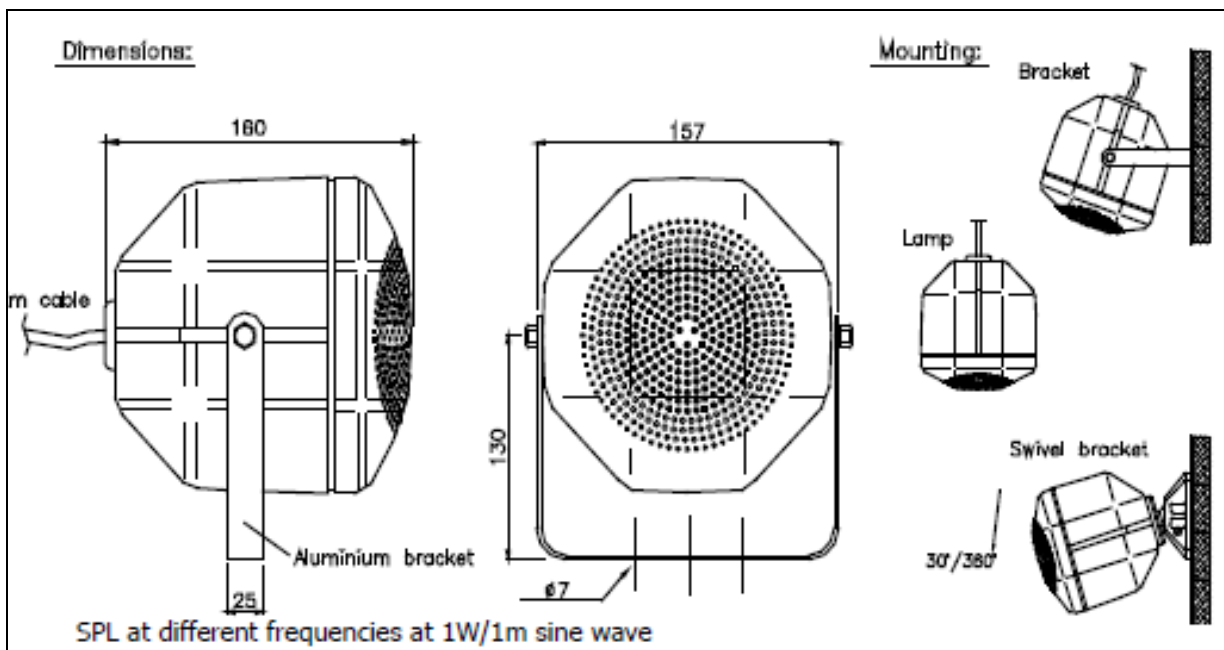

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no
 Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99
 Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com