

# MANUAL CALL POINT WITH SELFVERIFY - BF-503/EX

## Interactive fire detection systems Product Datasheet

### Features

- Pushbutton unit for use in harsh environmental conditions
- Weather proof
- Corrosion resistant GRP
- Protection degree IP66 and IP67
- Short circuit isolator in each unit
- Automatic addressing
- Proven technology
- With SelfVerify function for reduced maintenance/testing and increased reliability
- Designed to meet the requirement of the major maritime classification societies

### Description / Application

BF-503/EX is a manual call point for use in hazardous area zone 0, 1 or 2. It must be connected to the approved barrier BZ-500. The call point has been designed for use with Autronica's interactive fire detection systems and comprises the SelfVerify function. This function ensures the highest grade of reliability and the lowest degree of manual testing, because all units comprising this function are automatically self-tested once every 24 hours.

The high IP degree and mechanical strength of the enclosure makes the call point suitable for outdoor applications in industrial, maritime and offshore installations.

The call point must be installed according to local regulations, which normally means along escape routes, landings and exits.

### Principle

Lift flap and push the alarm button.  
Reset by means of reset key.

SelfVerify: the call point's ability to initiate alarms is regularly checked.

#### Related Drawing

No modifications permitted  
without reference to  
Ex Responsible



### Versions

- BF-503/EX/0100 Manual call point with SelfVerify. Ex ia version for use in zone 0, 1 and 2.
- BF-503/EX/0200 CO2 release station with SelfVerify. Ex ia version for use in zone 0, 1 and 2.
- BF-503/EX/0300 Release station with SelfVerify. Ex ia version for use in zone 0, 1 and 2.
- BF-503/EX/0400 Release station with SelfVerify. Ex ia version for use in zone 0, 1 and 2.
- BF-503/EX/0500 Release station with SelfVerify. Ex ia version for use in zone 0, 1 and 2.
- BF-503/N/0100\* Manual call point with SelfVerify. Ex ic version for use in zone 2.
- BF-503/N/0200\* CO2 release station with SelfVerify. Ex ic version for use in zone 2.
- BF-503/N/0300\* Release station with SelfVerify. Ex ic version for use in zone 2.
- BF-503/N/0400\* Release station with SelfVerify. Ex ic version for use in zone 2.
- BF-503/N/0500\* Release station with SelfVerify. Ex ic version for use in zone 2.

\* See separate datasheet


Product Name	Part number	Description
BF-503/EX/0100	116-BF-503/EX/0100	Manual call point, red
BF-503/EX/0200	116-BF-503/EX/0200	CO <sub>2</sub> release station, yellow
BF-503/EX/0300	116-KIT-BF-503/EX/0300	Release station, yellow*
BF-503/EX/0400	116-KIT-BF-503/EX/0400	Release station, green*
BF-503/EX/0500	116-KIT-BF-503/EX/0500	Release station, blue*

\* The release stations must have a duty label attached, specifying function. Please see product catalogue for variants.

Technical specifications	
Weight	1,2 kg
Material	Glass reinforced polyester
Colour	See description below
Voltage	10 - 27 VDC
Current consumption Stand by:	0,3 mA
Environm. requirement	EN 54
Degree of protection	IP66* and IP67*
Working temperature	-20 - +70 °C
Storage temperature	-55 - +70 °C
Cable inlets	2 x M20
Maintenance	None
Service	Replace if faulty
Certificate	See website
Notified body	Nemko ID No. 0470 CSA
Type examination certificate	NEMKO 03ATEX218X IECEX NEM 11.0009X
Directives, standards and Ex parameters	Refer to Doc-1003606 (Schedule drawing: "Control Drawing/User Manual/Technical Specifications and Instructions") where this information is listed. A link to this document is included on the product page for this product at <a href="http://www.product.autronicafire.com">www.product.autronicafire.com</a> .
Approvals	<a href="http://www.autronicafire.com">www.autronicafire.com</a>

\*requires approved cable glands and/or plugs of minimum the same IP level.

## Connections

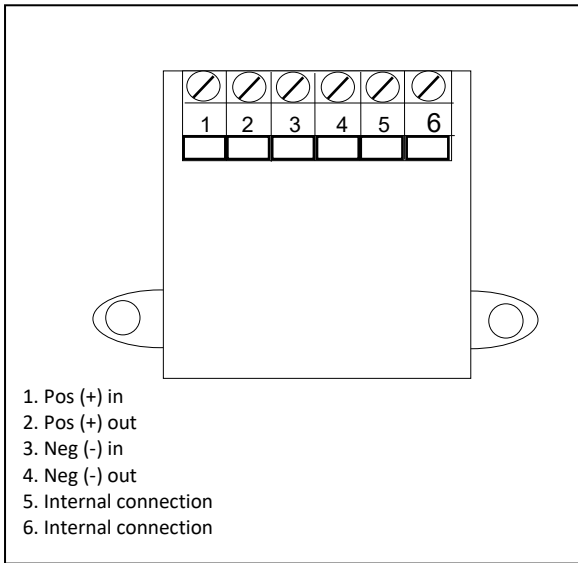

## Dimensions

