

# GM 6030 Projector speaker

AutoVoice BR-200

Product datasheet

## Features

- Designed for excellent music and voice playback thanks to a new coaxial 2-way loudspeaker
- High power, high efficiency in a attractive compact housing
- All models as weatherproof version (Kevlar membrane)
- Mounting brackets for universal wass ceiling mounting included
- Standard colour white (RAL 90010)


## Description

25W, with coaxial hi-fi loudspeaker, 100V transformer, ABS moulded, UVL – protection, round, white, weather resistant



Part number	Description
116-BBR-GM6030	Projector speaker

Technical specifications	
Loudspeaker system	1 way
Sensitivity (1W /1m)	87.9dB
SPL (20W /1m)	100.9dB
Max. SPL (1W / 1m/ 5134Hz)	94.2dB
SPL Pmax (20W /1m/ 5134Hz)	107.2dB
Average SPL (acc. DIN 60268-5)	84.4dB
Frequency response (-10dB)	126 – 15348 Hz
Power (100V line)	0V =black 5.0W =red 10W =blue 20W =yellow
Impedance (100V line)	2000/1000/500 Ohm
Coverage angle (-6dB)	120°@ 2KHz
Dimensions (ØxD)	137 x 293 mm
Weight	1.4 kg

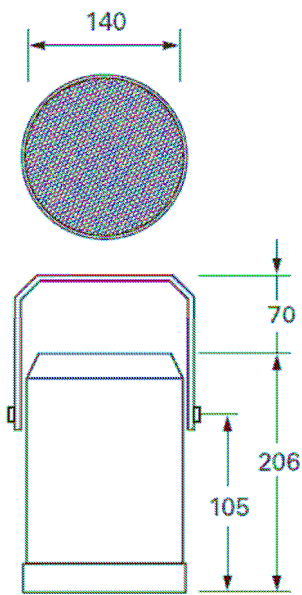

20 / 10 / 5W tapping

**AUTRONICA FIRE AND SECURITY AS**

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no

Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99

Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: [www.autronicafire.com](http://www.autronicafire.com)