

## Product overview

The Sensis Azure 2000s series offers industry-leading aspirating smoke detection technology, combining exceptional performance with cost-efficiency, specifically engineered for high ceilings and expansive open spaces, ensuring enhanced detection coverage and reliability in such specialized applications.

Utilising four independent Aspirators across upto four inlet pipes, the Sensis Azure 2000s uses a high-power Blue LED as its detection light source, with a short wavelength of 470 nm that is exceptionally sensitive to small smoke particles during the incipient stage of a fire. Employing Large Volume “Three-Dimension” detection, Sensis Azure 2000s has a specially engineered smoke chamber structure with a large total scattered light signal, enabling a more accurate representation of the actual concentration of smoke in the air.

The Smart Smoke Level (SSL) algorithm automatically activates upon power-up and gathers data on background environmental levels 24/7. The algorithm calculates the average background particle level and uses it as the reference point (zeroing) for detection, ensuring consistent performance and minimising nuisance alarms.


## Features

- **Very early warning smoke detection** – Alarm sensitive range of 0.005~20% obs/m, covering a maximum area of up to 2000 m<sup>2</sup>.
- **High Power Blue LED** – High Power Blue LED is a brighter light source with a shorter wavelength, which improves the response to smaller particles for earlier detection than conventional infra-red light sources.
- **Smart Smoke Level (SSL)** – Operates 24/7 to continuously monitor the background environmental value and establish a reference point for smoke concentration and alarm

SENSIS-AZURE-2000S, 2026-06-29

AUTRONICA FIRE AND SECURITY AS

BROMSTADVEGEN 59, 7047 TRONDHEIM | +47 90 90 55 00 | INFO@AUTRONICAGROUP.COM | WWW.AUTRONICAGROUP.COM | PAGE 1

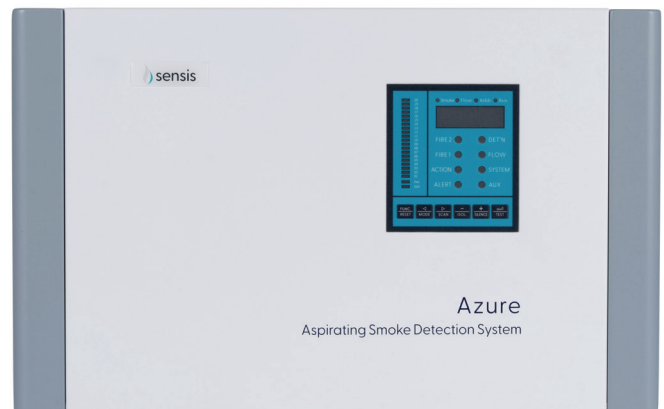

threshold to improve reliability and reduce false alarms.

- **3-in-1 display** – Optimised user interface with 3-in-1 display providing real-time smoke levels (20 segment bargraph), 4 fire alarm indicators, 4 fault indicators and an isolator indicator.
- **Display modes** – Delivers real-time data including smoke value, normalised flow value (%), device address and event log. Configure all functional parameter settings from the device, such as alarm thresholds, fan speed and device address.
- **Programmer Mode** – In Programmer Mode, users can configure all functional parameter settings such as alarm threshold adjustments, Fan speed alterations, and address changes.
- **Control Mode** – The Control Mode enables users to execute various actions including Reset, Isolate/De-isolate, Silence, and LED Test.
- **Signal output** – 7 relays (configurable) at 2 A @ 30 Vdc.

## Applications

Airports, Atrea, Building voids, Clean rooms, Cold storage, Data centres, Food factories, Heritage buildings, Lift shafts, Manufacturing, Telco, Warehouses, Wash down

## Approvals

EN54-20 and FM approved.

# Technical specification

Performance	
Smoke detection principle	Forward light scattering mass detection
Smoke detection range	0.001~25% obs/m
Alarm sensitivity range	0.005~20% obs/m
Area coverage	2,000 m <sup>2</sup>
Aspirator speed	1 ~ 10
Major components	4 x Sampling Pipes 4 x Aspirators 4 x Flow Sensors 1 x High Sensitivity Smoke Detector 1 x Filter
Pipe length (linear) <sup>1</sup>	4 x 100 m (328 ft)
Pipe length (branch) <sup>1</sup>	4 x 240 m (787½ ft)
EN54-20 Class A/B/C <sup>1</sup>	40/60/100
Alarm levels and time delay	
Alert	(0~60 seconds)
Action	(0~60 seconds)
Fire-1	(0~60 seconds)
Fire-2	(0~60 seconds)
Smart Smoke Learning (SSL) operation	24 hours, 365 days non-stop smoke background level learning
Flow detection principle	Heat mass detection
Flow monitoring	<ul style="list-style-type: none"> <li>• Pipe flow normalize to 100%</li> <li>• Flow high and flow low fault</li> <li>• Adjustable flow detection sensitivity</li> </ul>
Mechanical specification	
Sampling pipe material	ABS/UPVC
OD	25 mm (1")
IP rating	IP40
Net weight	5.2 kg (11.5 lb)

Electrical specification	
Relay output	7 relays on termination board (configurable)
Rating	2 A @ 30 Vdc
Zone relay output (4A16 version)	16 relays on one Relay Board (configurable)
Rating	2 A @ 30 Vdc
General purpose inputs	8 x GPIs (configurable)
GPI functions <sup>2</sup>	Reset/Isolate/Silence/Test/Scan/Mains Fault/Battery Fault/Power FaultSensitivity Mode 1/Sensitivity Mode 2/UDI-1/UDI-2/UDI-4/UDI-5*
Communication (2000s model)	
Network	RS-485 network
Max. no. of devices	250
Repeater	Built in
Max. cable length between two adjacent devices	1.2 km (3,937 ft)
Protocol	Support modbus RTU open protocol
Event logs	
Number of events	183,000
Event type	Alarm/Fault/Operation/Smoke/Flow/Auxiliary Gas Sensors
Operating conditions	
Ambient temp.	0~40°C (0~104°F)
Tested	-30°C~-+55°C (-22~131°F)
Sampling air temp.	-20~60°C (-4~140°F)
Humidity	10~95% RH non-condensing
Operating voltage	24 ±4.8 Vdc   385 mA – 1050 mA

<sup>1</sup> Per EN54-20 Class A Sensitivity. Please refer to Sensis design manual for the details about pipe length and the number of sampling holes.

<sup>2</sup> UDI: User Defined Input

## Part numbers

Part number	Description
116-4020-100	Sensis Azure 2000s (1A) 4 pipes, 1 address
116-4021-100	Sensis Azure 2000s (4A) 4 pipes, 4 addresses
116-4022-100	Sensis Azure 2000s (4A16) 4 pipes, 4 addresses, 16 relays

## Accessories

Part number	Description
116-4800-000	Sensis Network Interface Module (NIM-1200)
116-4800-001	Sensis Network Control Panel (NCP-1215) with display for floor plans
116-4800-003	RS485 to USB Converter for programming and commissioning
116-4800-004	Sensis Azure Dual Stage Filter (replacement filter)

## Dimensions and internal structure

