


Tekniske data / Technical data:

Dimensjoner / Dimensions: (H x B x D) / (H x W x D)		: 87 x 87 x 39 mm
Vekt / Weight		: 108 g
Materiale / Materials		: Rød termoplast / Red thermo plastic
Utgaver / versions:		: Forskjellige underlags- bokser / Different mounting boxes
Spenning / Voltage		: 14 V DC \pm 2 V
Strømforbruk / Current consumption		
Hvilestrøm / Stand by		: 0,1 mA
Signalstrøm / Signal		
Normal / Normal		: 8 mA
Alarm / Alarm		: >22 mA
Miljøkrav / Environmental requirem.		: Iflg. BS-5839 / Acc. to BS-5839
Miljø / Environment		: For tørre rom / For dry rooms
Beskyttelsesgrad / Protecting grade		: IP 24D
Arbeidstemperatur / Working temperature		: - 30°C to + 50°C
Fuktighet (ikke kond.)/ Humidity (non condensing)		: Max. 95 % R.H.

Vedlikehold / Maintenance	: Bytt ut knust glass / Replace broken glass
Service / Service	: Utskiftes ved feil / Replace if faulty

Approvals / Godkjenninger:

Notified Body / Godkj. etat	Nemko, Oslo, Norway ID No. 0470
EC type examination certificate / EC type sertifikat	Nemko 03ATEX 219X
Directive and standards / Direktiver og standarder	94/9/EC (ATEX) EN 50014 EN 50020 89/336/EEC (EMC) Emission: EN 50081-1: 1992 Immunity: EN 50130-4: 1995 EN: 61000-6-2: 1999
Ex parameters / Ex-parametere	 II 2 G EEX ib IIC T5 U = 17,5VDC C _m < 10nF L _{eq} = 0

Dimensjoner og tilkobling / Dimensions and connection:

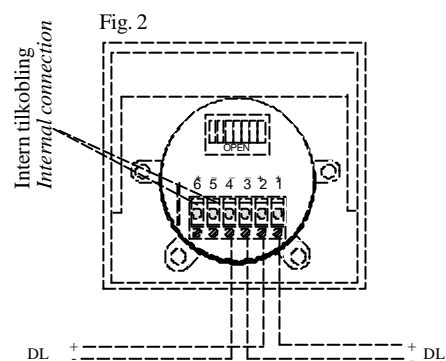
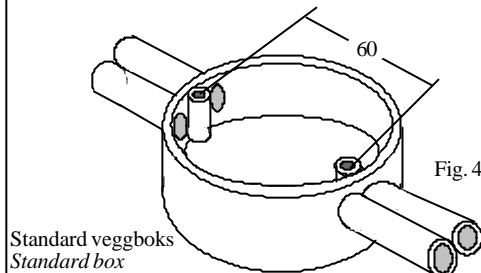
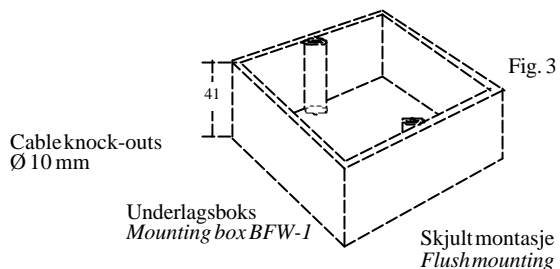
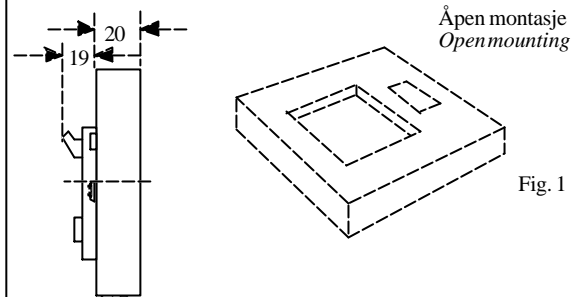


Fig. 1 Melder / Call point
Fig. 2 Tilkobling / Connections
Fig. 3 Underlagsboks type BFW-1 / Mounting box type BFW-1
Fig. 4 Veggbox / Box for flush mounting

DL Detektorsløyfe / Main detector loop

* Ikke tillatt i sone 1 / Not allowed in zone 1

Managing Director Mr. Frode Lund

Autronica Fire and Security AS

Fire and Security, Trondheim, Norway. Phone: + 47 73 58 25 00, fax: + 47 73 58 25 01.
Oil & Gas, Stavanger, Norway. Phone: + 47 51 84 09 00, fax: + 47 51 84 09 99.

Visit Autronica Fire and Security's Web site: www.autronicafire.com