

THE PACKAGES

We provide standard packages designed for the general vessel types. It may depend on vessel size, or market demands. All cameras are from the 3 series.

10 camera solution

- 1 x recorder (16 channels, 4 TB storage)
- 3 x varifocal bullet cameras, 2 megapixel, outdoor
- 3 x mini-bullet, 2 megapixel, in/outdoor
- 6 x wedge cameras, 2 megapixel
- 1 x 24" monitor
- 1 x PoE switch


25 camera solution


1 x recorder (32 channels, 8 TB storage)

- 6 x varifocal bullet cameras, 2 megapixel, outdoor
- 8 x mini-bullet, 2 megapixel, in/outdoor
- 11 x wedge cameras, 2 megapixel
- 1 x 24" monitor
- 2 x PoE switch

50 camera solution


- 1 x recorder (64 channels, 16 TB storage)
- 6 x varifocal bullet cameras, 2 megapixel, outdoor
- 6 x varifocal fixed dome
- 16 x mini-bullet, 2 megapixel, in/outdoor
- 22 x wedge cameras, 2 megapixel

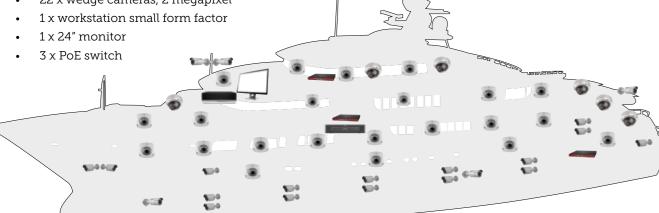









SECURITY SOLUTIONS

CCTV for smaller vessels from Autronica Fire and Security

ether its monitoring a single door or multiple properties, people and assets, we can deliver a video management solution to meet almost any security requirements. Comprehensive offering of security products delivers outstanding performance that's scalable to meet future needs. Engineered with innovative technologies and features, our products help leverage every system for optimal protection and control.

TruVision digital video surveillance products deliver outstanding image capture capability to effectively secure demanding applications. IP components including VMS software, megapixel cameras and recording devices that work together to form a ready-made IP solution.

www.autronicafire.com



3 SERIES



Ou







odel	TVB-5301	TVB-5303	TVW-5302	TVD-5303
egapixels	2	2	2	2
ax frames per second	30	30	30	30
ay/Night	* / C	☆ / C	☆ / C	* / C
umination	0.01 lux	0.01 lux	0.01 lux	0.01 lux
Range	25 m	30 m	10 m	30 m
ens type	Fixed	Varifocal	Fixed	Varifocal
orizontal View Angle(°)	90 🌰	106-35	109,4	106-35
ertical View Angle(°)	48	55-19	62,4	55-19
utofocus				
utdoor (IP66)	\checkmark	\checkmark	\checkmark	\checkmark
andal proof			7*	74
imensions (mm)	60 x 153	105 x 94.7 x 265.4	99 x 97 x 53	140 x 100
/eight (g)	373	800	409	807





TVB-5401	TVB-5403
2	3
60	60
¢ / €	¢ / €
0.002 lux	0.008 lux
50 m	50 m
Motorized	Motorized
90,1-31	105-32
•	-
44-17,5	69-29
44-17,5	
•	69-29 ✓ ✓
44-17,5	
44-17,5	
44-17,5 ✓	\checkmark

Service and maintenance

Service and maintenance must be performed in accordance with local/national requirements. We recommend an annual service and control of the total system. We refer to relevant procedures included in the installation and commissioning handbooks from Autronica.

7



Use of TruVision Navigator

TruVision Navigator is best suited for small or medium scaled as well as multi-site installations where you either actively manage a small amount of cameras with a small amount of operators, or when passively managing a larger amount of cameras with a small amount of operators.

4 SERIES



TVD-5403	TVD-5405		
5	2		
30	60		
☆ / C	☆ / C		
0.01 Lux	0.002 Lux		
30 m	50 m		
Motorized	Motorized		
74,6-26,8	42,2-13,5		
50-20	23-7,5		
\checkmark	\checkmark		
	\checkmark		
7"	7*		
140 x 122	160 x 146		
1400	2100		

11 SERIES

