

Ceiling speaker - BBR-DEL 130/6 PP


Voice alarm system
Product datasheet

Ceiling speaker

Classic ceiling speaker for voice alarm.
Equipped with firedome, ceramic terminal block,
thermal fuse and a temperature resistant cable,
providing increased security in case of a fire.

BBR-DEL 130/6 PP is approved according to EN 54-24:2008. With its classic design and its excellent acoustic characteristics, this speaker is ideally suited for a wide variety of applications.

The BBR-DEL 130/6 PP, made of powder-coated metal with a 130 mm full range chassis, is specially designed for voice messages and background music reproduction in stores, schools and hotels. The exceptional spring mounting with cropped leg springs ensures rapid ceiling installation.

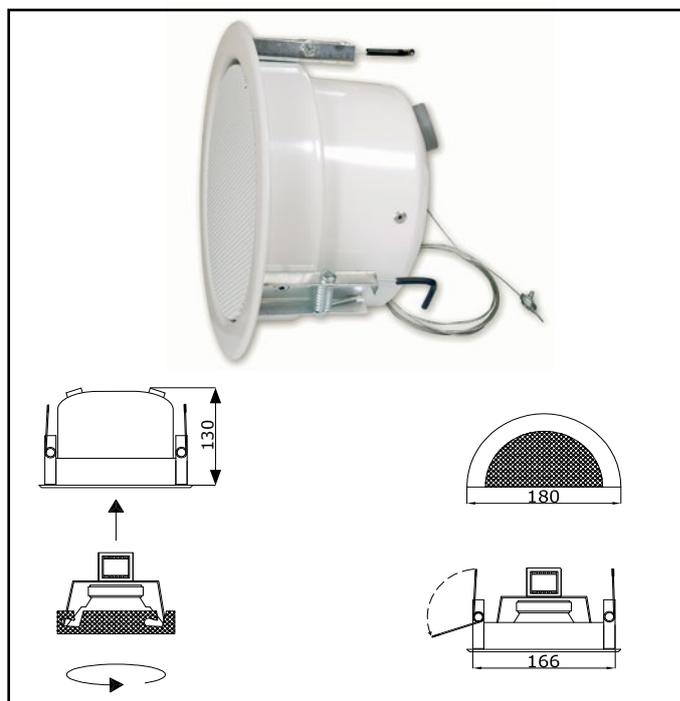

| Technical specifications | |
|-----------------------------------|----------------------------------|
| Certification | EN 54-24:2008 |
| Loading rate | 6 Watt |
| Chassis type | 130 mm full range |
| Frequency range (-10 dB) | 310 — 14 800 Hz |
| SPL 1 W / 1 m | 99,2 dB |
| SPL Pmax / 1 m | 110,9 dB |
| Radiation angle 1.000 Hz (-10 dB) | 180° |
| Transformer | 100 V, 6/3/1,5/(0,75) Watt |
| Dimensions | Ø180 x 130 mm installation depth |
| Cut out | Ø166 mm - 170 mm |
| Weight | 1,4 kg |
| Material | Powder coated steel panel |
| Connection | 3-pole ceramic clamp |
| Colour | RAL 9010 White |

| Part number | Description |
|----------------------|-------------------------------|
| 116-BBR-DEL 130/6 PP | CEIL SPEAK 6W DEL 130/6 EN 54 |

AUTRONICA FIRE AND SECURITY AS

Head office, Trondheim, NO-7483 Norway Tel: +47 73 58 25 00, fax: +47 73 58 25 01, e-mail: info@autronicafire.no

Oil and Gas division, Stavanger, Norway Tel: +47 51 84 09 00, fax: +47 51 84 09 99

Maritime division, Spikkestad, Norway Tel: +47 31 29 55 00, fax: +47 31 29 55 01

Visit Autronica Fire and Security AS' website: www.autronicafire.com