

4-channel technology and I<sup>2</sup>C BUS-logic

APS-24 - Digital Text Store.

For recording/playing up to 99 messages with quality play-back rendition (warning and evacuation instructions, advertising slots, etc.)

100% reliability, 100% digital storage with supply-independent data memory in Flash-EEProm (with hardware). Delete-protection for important messages.

- As module APS-24 or as stand-alone unit in separate cabinet and power supply, integrated control speakers, etc.
- For recording and playing up to 99 different messages of random length (advertising slots, warning and evacuation instructions, repeated messages).
- Easy operation using integrated menu control with LCD indication.
- Integrated time switch for start/stop of individual messages, or for activating different pre-selected messages at pre-determined times. Up to 32 messages can be time-set simultaneously.
- Integrated siren/chime for alarm groups, programmable.
- Timer function (advertising slots) from 1 minute to 60 minute.
- Can be combined with pre-signal (alarm sirens, gong) using APS-07, APS-08, APS-09 modules.
- Each individual message can be activated remotely, with automatic connection of the control panels (APS-52) or from an RS-232 interface.
- Recording: From APS-300 microphone console or separate CD-player (-10dBm).
- Separate volume, bass and treble controls on the front.
- RWS-24 connection module accessory with 5-phase plug-in terminal board.
- Operating keys may be removed (using pliers) if required. Unit is then operated using a screwdriver (to avoid changing settings accidentally).





## Technical specifications

Band width	6400 Hz
No. of messages	Max. 99 (of varying lengths)
Total capacity	960 seconds
Contents memory	with Flash EEPROM
Internal timer for automatic activation of messages	Day/hour/minute
Alarm groups	8
No. of messages per alarm group	max. 5
Interval (break between two consecutive messages)	1 - 31 minutes
Message series	Max. 32 messages (programmable)
Fix programs (specific message at a specific time)	4
Option for activating messages 77-99	Selective via APS-5x connecting and control module
Recording	using APS-300 mic console or auxiliary sound unit (-10dBm input with integrated option for setting the volume).

Article number	Description
BRG-APS24	Digital Text Store

APS-24

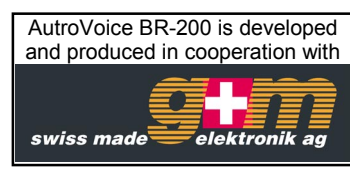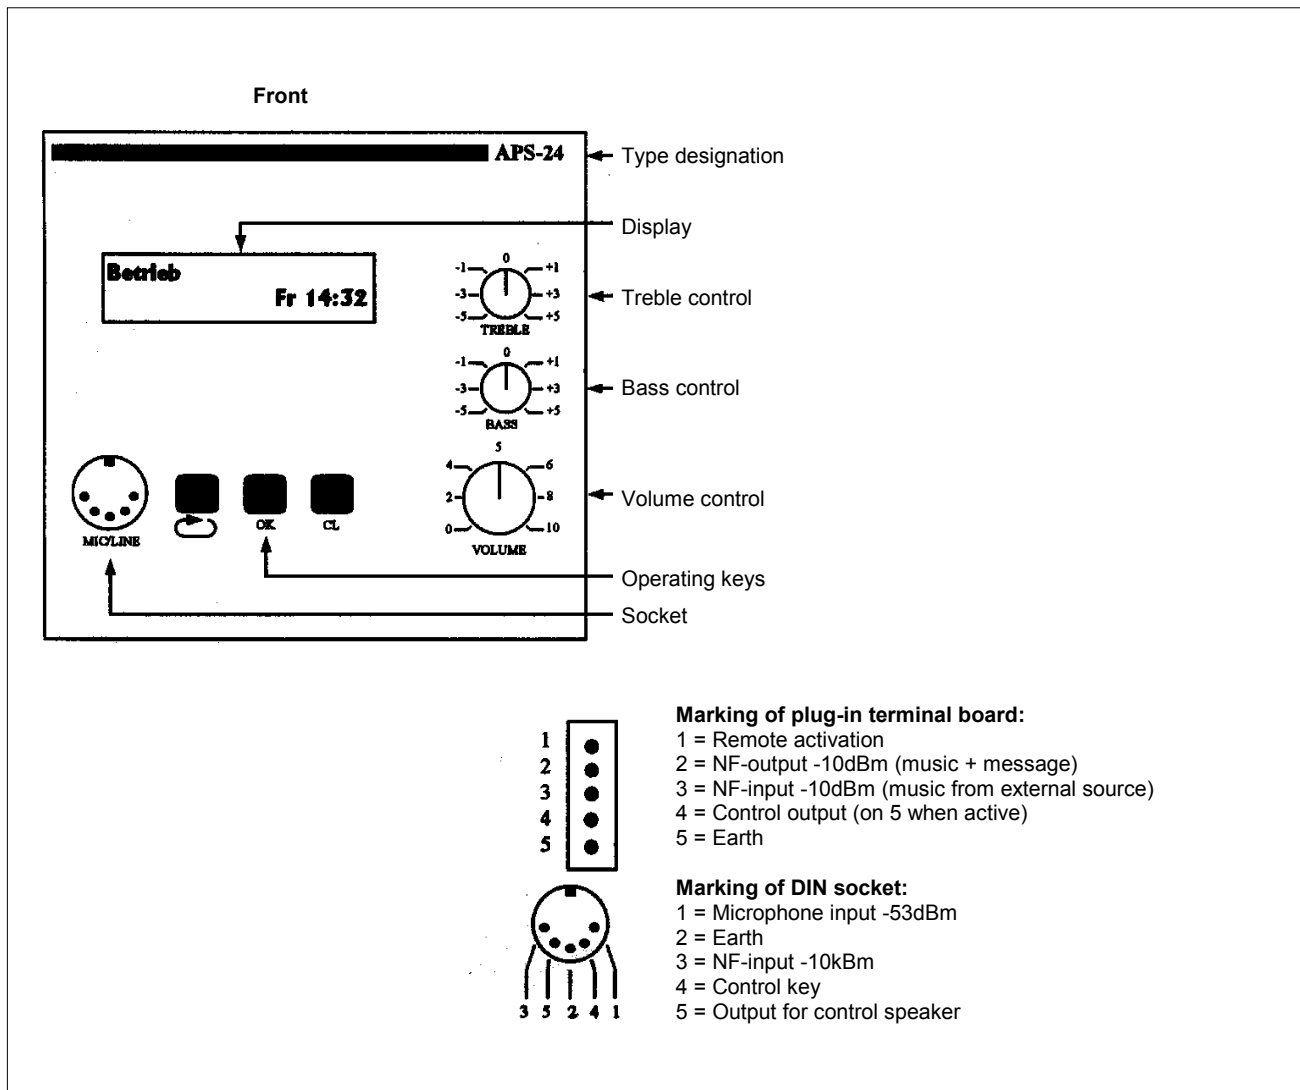

Autronica Fire and Security AS

Fire and Security, Trondheim, Norway. Phone: + 47 73 58 25 00, fax: + 47 73 58 25 01.

Oil & Gas, Stavanger, Norway. Phone: + 47 51 84 09 00, fax: + 47 51 84 09 49.

Autronica Industrial Ltd., Watford, United Kingdom. Phone: 1923 23 37 68, fax: 1923 22 55 77.

[www-autronicafire.no](http://www-autronicafire.no)